


20 SERIE GEAR PUMP ISO BI-ROTATIONAL

20 SERİ DİŞLİ POMPA ISO ÇİFT YÖNLÜ



Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

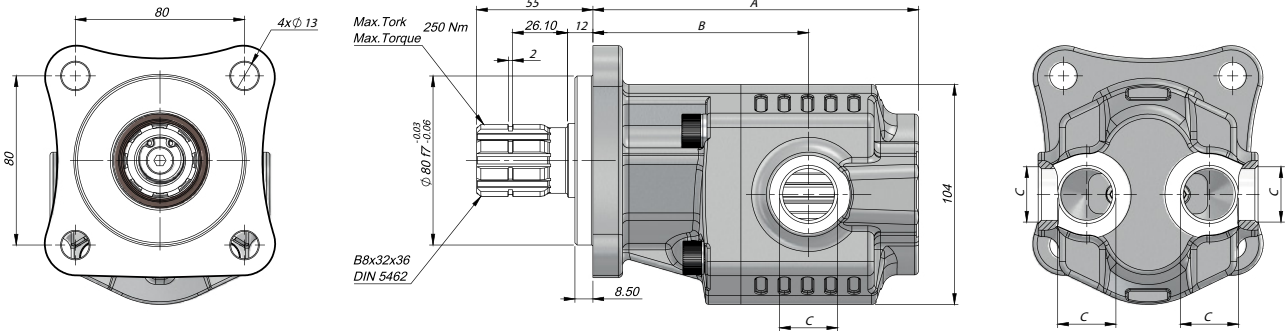

Code	Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
20-ISO	(cm ³ /rev)	(100%) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	C
32000651	6	280	300	2300	124	90	G 1/2"	G 1/2"
32001051	10				130	96		
32001651	16				140	96		
32002051	20	260			146	100		
32002551	25	220			154	102		
32003251	32	190		2100	165	113	G 3/4"	G 3/4"
32004051	40	180		1900	178	126		