


20 SERIE GEAR PUMP UNI BI-ROTATIONAL

20 SERİ DİŞLİ POMPA UNI ÇİFT YÖNLÜ



Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

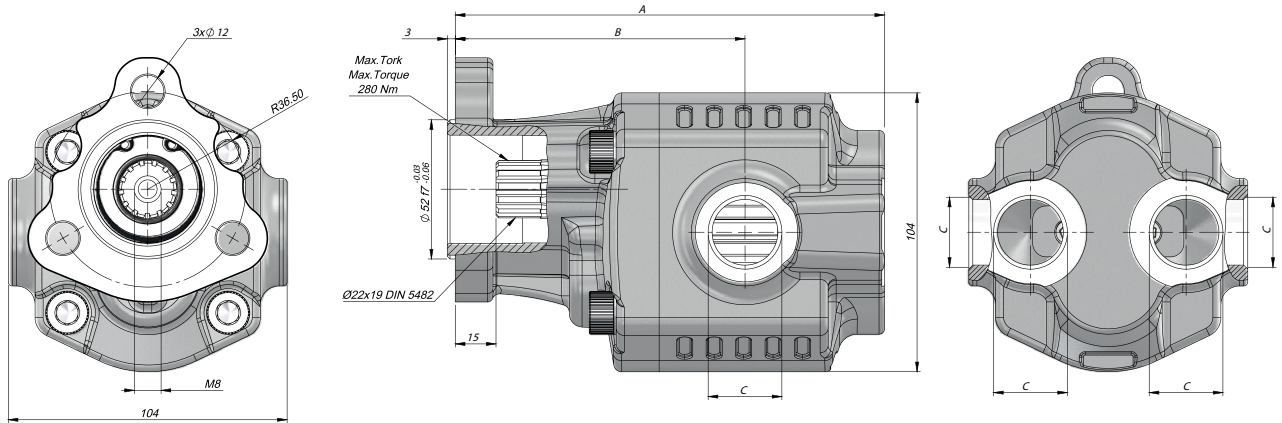

Code	Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
20-UNI	(cm³/rev)	(100%) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	C
32000641	6	280	300	2300	130	96	G 1/2"	G 1/2"
32001041	10				136	102		
32001641	16				146	102		
32002041	20				152	106		
32002541	25	220		2100	160	108	G 3/4"	G 3/4"
32003241	32	190			171	119		
32004041	40	180			184	132		