


30 SERIE TANDEM GEAR PUMPS ASAE LONG SHAFT


30 SERİ TANDEM ASAE UZUN MİL DİŞLİ POMPALAR

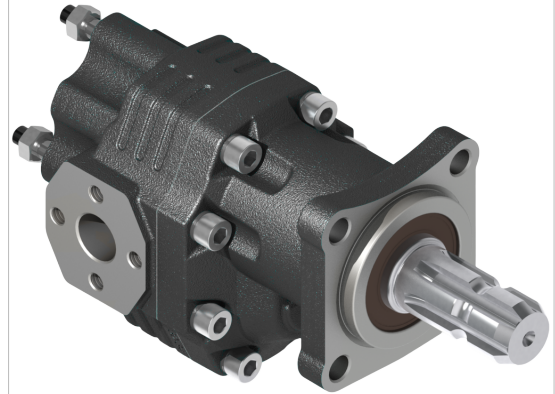

30 SERIES GEAR PUMPS
30 SERİ DİŞLİ POMPA

HYDRAULIC PUMPS
HİDROLİK POMPALAR

Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

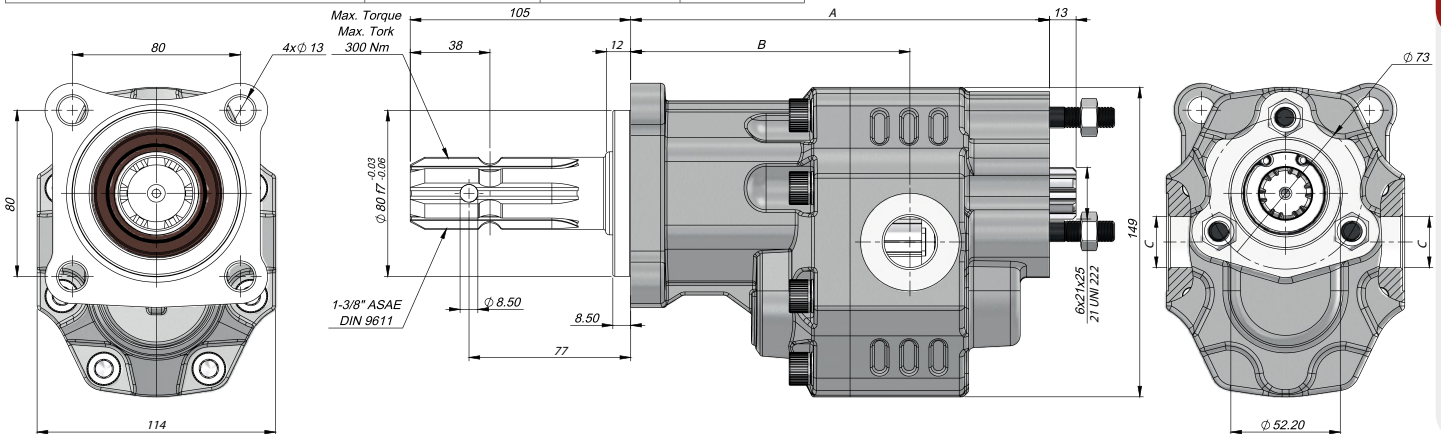

Code			Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm³/rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
33301712TAN	33301731TAN	3017AL331	17	300	300	2600	182,5	123,5	G 1/2"	G 1/2"
33302712TAN	33302711TAN	3027AL331	27	290			188,5	126,5		
33303412TAN	33303411TAN	3034AL331	34	285		2300	193,5	128,5	G 3/4"	G 3/4"
33303612TAN	33303611TAN	3036AL331	36				195,0	128,5		
33303812TAN	33303811TAN	3038AL331	38				193,5	128,5		
33304312TAN	33304311TAN	3043AL331	43	280		2100	199,5	133,0	G 1"	G 1"
33305112TAN	33305111TAN	3051AL331	51	230			204,5	134,5		
33306112TAN	33306111TAN	3061AL331	61	225		2000	212,5	138,5	G 1"	G 1"
33307312TAN	33307311TAN	3073AL331	73	215		1800	217,5	146,5		
33308212TAN	33308211TAN	3082AL331	82	200		1700	223,5	146,0	G1 1/4"	G1 1/4"
33110012TAN	33310011TAN	3100AL331	100	190		1600	236,5	160,0		
33312512TAN	33312511TAN	3125AL331	125	170			252,5	164,0		

*The values in the table refer to unidirectional pumps. Reversible pump max pressures are 10% lower than those shown in table. For different working conditions please consult our sales department.