



30 SERIE TANDEM GEAR PUMPS ASAE SHORT SHAFT

30 SERİ TANDEM ASAE KISA MİL DİŞLİ POMPALAR

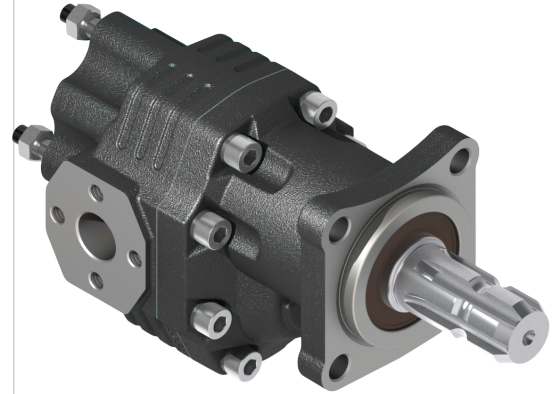

Inlet Pressure	0.3 ÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

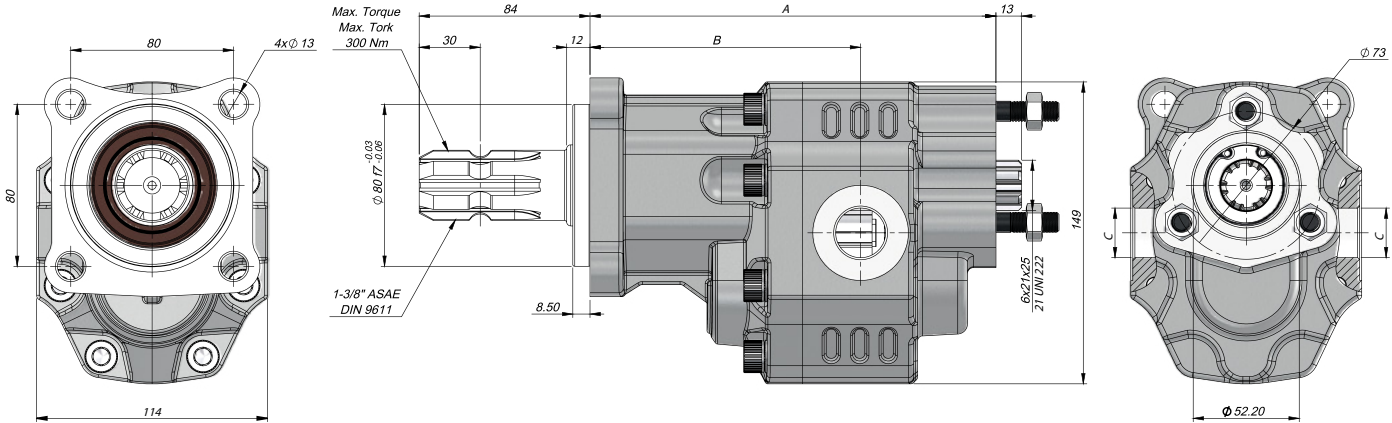

Code			Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm³/rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
33201712TAN	33201711TAN	3017AS231	17	300	300	2600	182,5	123,5	G 1/2"	G 1/2"
33202712TAN	33202711TAN	3027AS231	27	290			188,5	126,5		
33203412TAN	33203411TAN	3034AS231	34	285		2300	193,5	128,5	G 3/4"	G 3/4"
33203612TAN	33203611TAN	3036AS231	36				195,0	128,5		
33203812TAN	33203811TAN	3038AS231	38				193,5	128,5		
33204312TAN	33204311TAN	3043AS231	43	280		2100	199,5	133,0	G 1"	G 1"
33205112TAN	33205111TAN	3051AS231	51	230			204,5	134,5		
33206112TAN	33206111TAN	3061AS231	61	225		2000	212,5	138,5	G 1"	G 1"
33207312TAN	33207311TAN	3073AS231	73	215		1800	217,5	146,5		
33208212TAN	33208211TAN	3082AS231	82	200		1700	223,5	146,0	G1 1/4"	G1 1/4"
33210012TAN	33210011TAN	3100AS231	100	190		1600	236,5	160,0		
33212512TAN	33212511TAN	3125AS231	125	170			252,5	164,0		

*The values in the table refer to unidirectional pumps. Reversible pump max pressures are 10% lower than those shown in table. For different working conditions please consult our sales department.