


HYDRAULIC PUMPS

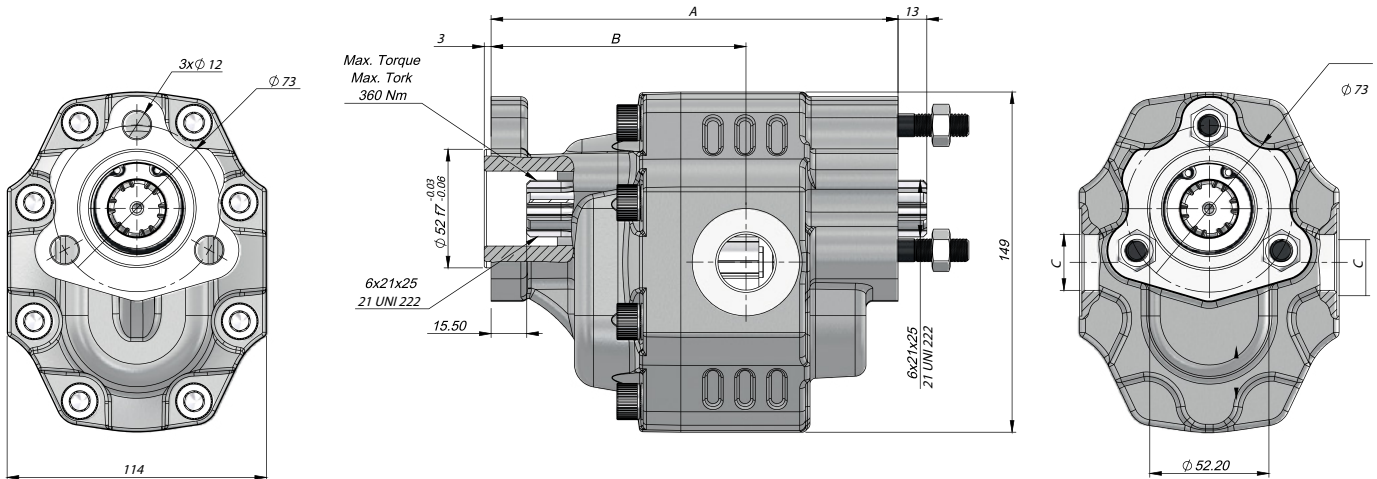

Code			Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm³/rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
33001712TAN	33001711TAN	3017GM431	17	300	300	2600	161,0	102,0	G 1/2"	G 1/2"
33002712TAN	33002711TAN	3027GM431	27	290			167,0	105,0		
33003412TAN	33003411TAN	3034GM431	34	285		2300	172,0	107,0	G 3/4"	G 3/4"
33003612TAN	33003611TAN	3036GM431	36				173,5	118,5		
33003812TAN	33003811TAN	3038GM431	38				174,0	118,5		
33004312TAN	33004311TAN	3043GM431	43	280		2100	176,0	111,5	G 1"	G 1"
33005112TAN	33005111TAN	3051GM431	51	230			183,0	113,0		
33006112TAN	33006111TAN	3061GM431	61	225		2000	191,0	117,0	G 1 1/4"	G 1 1/4"
33007312TAN	33007311TAN	3073GM431	73	215		1800	196,0	125,0		
33008212TAN	33008211TAN	3082GM431	82	200		1700	202,0	124,5	G1 1/4"	G1 1/4"
33010012TAN	33010011TAN	3100GM431	100	190		1600	215,0	138,5		
33012512TAN	33012511TAN	3125GM431	125	170			231,0	142,5		

*The values in the table refer to unidirectional pumps. Reversible pump max pressures are 10% lower than those shown in table. For different working conditions please consult our sales department.