
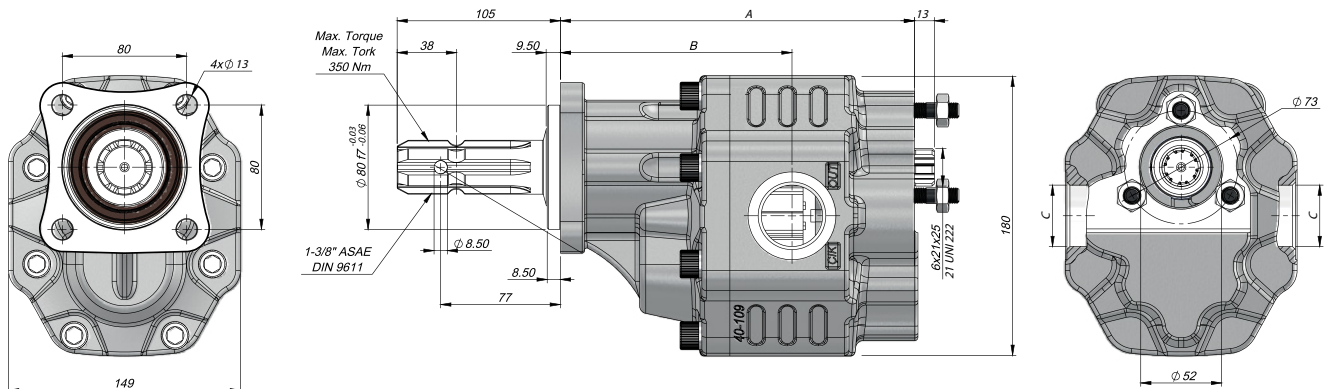


40 SERIE TANDEM GEAR PUMPS ASAE LONG SHAFT

40 SERİ TANDEM ASAE UZUN MİL DİŞLİ POMPALAR

Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

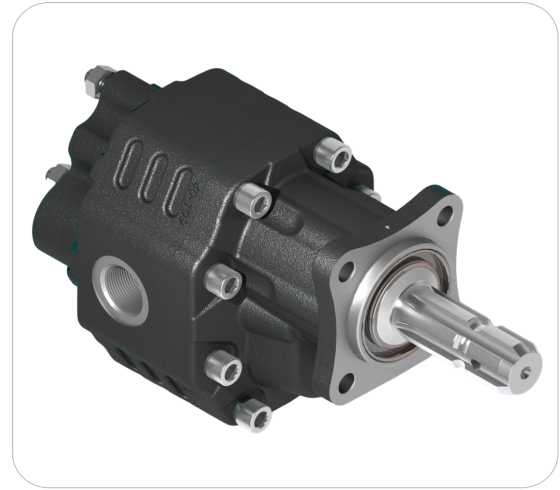

Code			Displacement	Max. Continuous Pressure	Min. Speed	Max. Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm ³ /rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
43306312TAN	43306311TAN	340063AL831	63	290	300	1800	211	139	G 1 1/4"	G 3/4"
43307312TAN	43307311TAN	340073AL831	73	280			215	139		
43308712TAN	43308711TAN	340087AL831	87	260			220	143	G 1 1/2"	G 1"
43310912TAN	43310911TAN	340109AL381	109	250			228	149		
43313312TAN	43313311TAN	340133AL831	133	220		1800	237	150	G 1 1/2"	G 1"
43315112TAN	43315111TAN	340151AL831	151	180			243	152,5		

*The values in the table refer to unidirectional pumps. Reversible pump max pressures are 10% lower than those shown in table. For different working conditions please consult our sales department.

40 SERIES GEAR PUMPS
40 SERİ DİŞLİ POMPALAR

HYDRAULIC PUMPS
HİDROLİK POMPALAR