



40 SERİ TANDEM ASAE KISA MİL DİŞLİ POMPALAR

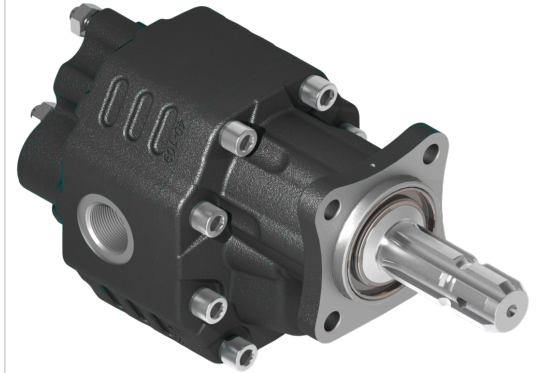

Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638 ISO 4406		Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

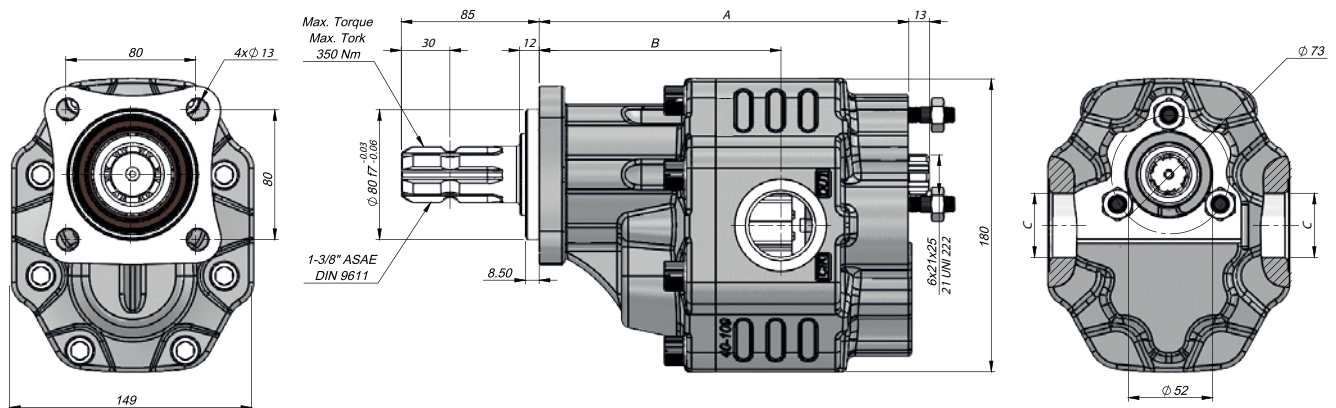

Code			Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm³/rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
43206312TAN	43206311TAN	340063AS231	63	290	300	1800	211	139		G 3/4"
43207312TAN	43207311TAN	340073AS231	73	280			215	139		
43208712TAN	43208711TAN	340087AS231	87	260			220	143	G 1"	
43210912TAN	43210911TAN	340109AS231	109	250			228	149		
43213312TAN	43213311TAN	340133AS231	133	220			237	150	G 1 1/2"	
43215112TAN	43215111TAN	340151AS231	151	180			243	152,5		

gemmahydraulic.com