


40 SERIE TANDEM GEAR PUMPS ISO

40 SERİ DİŞLİ POMPA TANDEM ISO DİŞLİ POMPALAR



Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

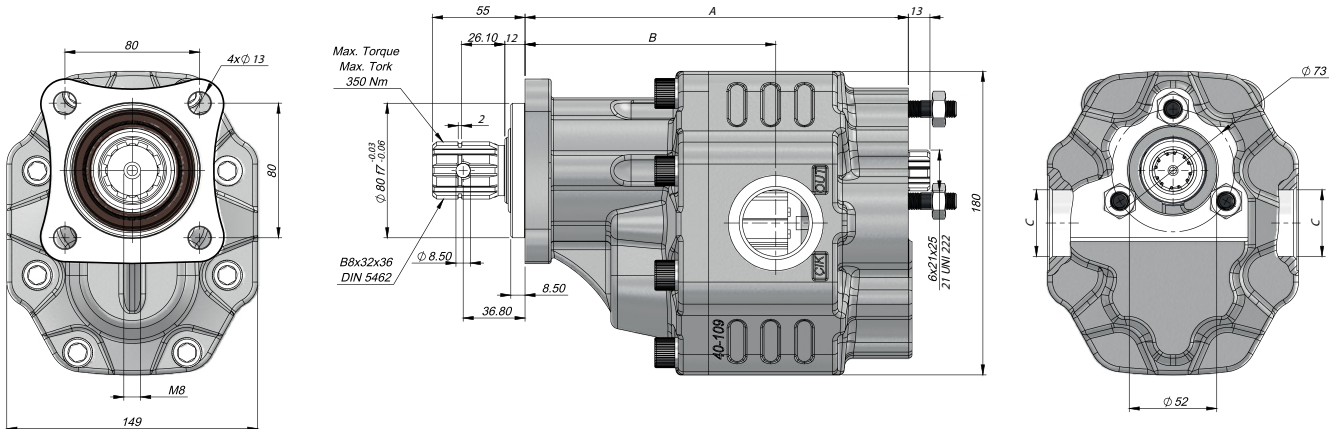

Code			Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm³/rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
34006332TAN	34006331TAN	4063GM131	63	290	300	1800	211	139	G 1"	G 3/4"
34007332TAN	34007331TAN	4073GM131	73	280			215	139		
34008732TAN	34008731TAN	4087GM131	87	260			220	143	G 1 1/4"	G 1"
34010932TAN	34010931TAN	40109GM131	109	250			228	149		
34013332TAN	34013331TAN	40133GM131	133	220			237	150	G 1 1/2"	
34015132TAN	34015131TAN	40151GM131	151	180			243	152,5		

*The values in the table refer to unidirectional pumps. Reversible pump max pressures are 10% lower than those shown in table. For different working conditions please consult our sales department.

40 SERIES GEAR PUMPS
40 SERİ DİŞLİ POMPA

HYDRAULIC PUMPS
HİDROLİK POMPALAR