


40 SERIE GEAR PUMP TANDEM UNI

40 SERİ TANDEM UNI DİŞLİ POMPALAR



Inlet Pressure	0.3÷ 2 bar		
Operating Viscosity	-12:100 cSt		
Fluid Temperature	-40 °C+145 °C		
Working Pressure	Contamination NAS 1638	ISO 4406	Filtre βx=75
≥200 bar	11	20/17	25 μm
≤200 bar	12	21/18	40 μm

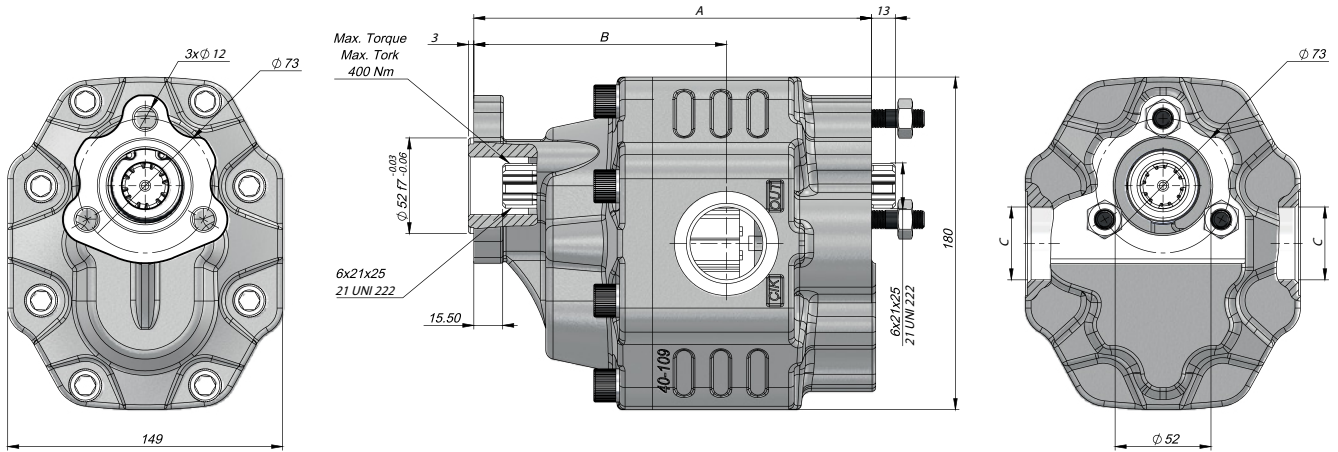

Code			Displacement	Max.Continuous Pressure	Min. Speed	Max.Continuous Speed	A	B	Inlet	Outlet
Left	Right	Bi-Rotational	(cm³/rev)	(%100) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
34006312TAN	34006311TAN	4063GM431	63	290	300	1800	199	127	G 1"	G 3/4"
34007312TAN	34007311TAN	4073GM431	73	280			203	127	G 1 1/4"	
34008712TAN	34008711TAN	4087GM431	87	260			208	131		G 1 1/2"
34010912TAN	34010911TAN	40109GM431	109	250			216	137		
34013312TAN	34013311TAN	40133GM431	133	220			225	138		
34015131TAN	34015111TAN	40151GM431	151	180			231	140,5		

*The values in the table refer to unidirectional pumps. Reversible pump max pressures are 10% lower than those shown in table. For different working conditions please consult our sales department.