






TECHNICAL DATA

TEKNIK VERİLER




DUAL FLOW HIGH PRESSURE PISTON PUMP 53+53 / 56+26

ÇİFT ÇIKIŞLI YÜKSEK BASINÇ PİSTONLU POMPA 53+53 / 56+26

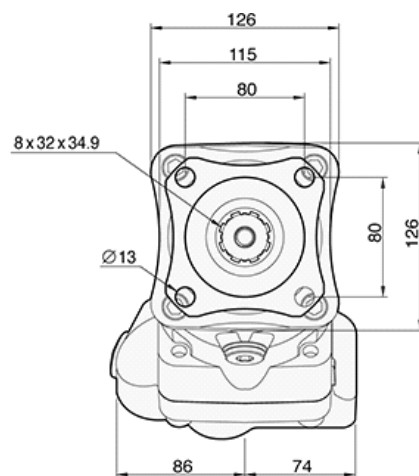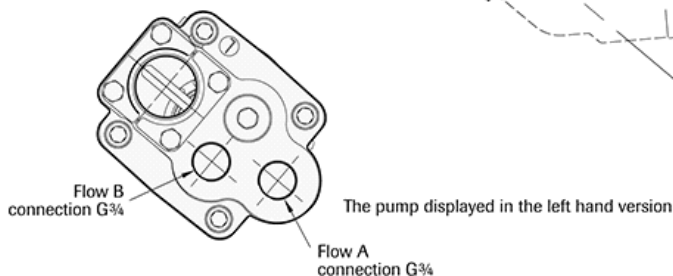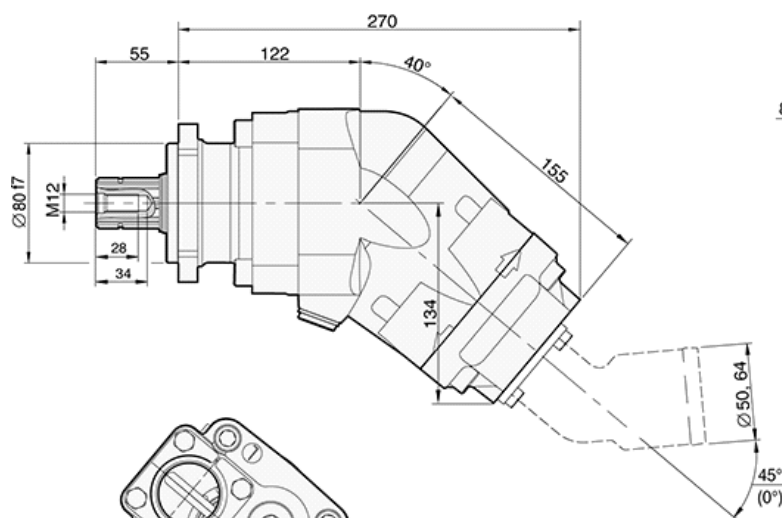

Spline shaft:
DIN 5462 / ISO 14
Mounting flange:
ISO 7653-D

PISTON PUMPS & MOTORS OVERAL EFFICIENCY CURVE

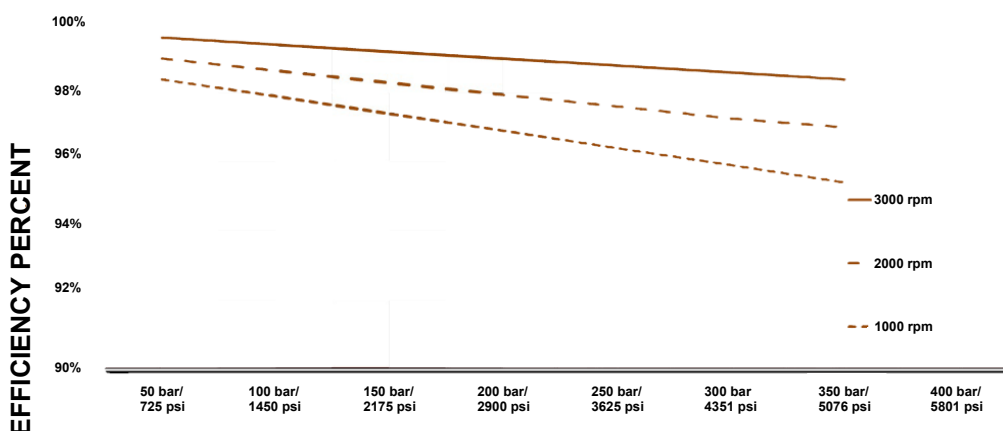

53+53 and 56+26 cc Options
High Pressure
High Efficiency
Long Life
Low Working Noise
For Use DIN mount PTO
Nickel Cover
Seal and Color Options
Parallel Working Operation

Pump Code	Displacement	Max. Continuous Pres.	Maximum Peak Pres.	Continuous Rotating Speed	Max. Rotating Speed	Overhang Torque	Working Temperature Min/Max	Weight
	@1000 RPM	BAR	BAR	RPM	RPM	Nm	°C	KG
35425353	53+53	300	400	1900	2500	21	-35/+90	18
35425626	56+26	300	400	1900	2500	21	-35/+90	18